


LED WANDLAMP OUTDOOR - INSTRUCTIES

Attentie: Lees de onderstaande instructies aandachtig door en bewaar deze instructies als referentie.

Item	47355
Type	3535 SMD - 4 LED's
Lumen	830 Lm
Wattage	12 watt
Voltage	230V ~ 50Hz
Powerfactor	0.5
Levensduur	30.000 uur
Schakelcycli	15.000 x
Opwarmtijd	< 1 seconde
Kleurtemperatuur	3000 K
Dimbaar	Nee
Lichtstraal hoek	90°
CRI	>RA 65
Beschermingsklasse	IP54
Veiligheidsklasse	II
Afmetingen L x H x B	220 x 63 x 90,3 mm

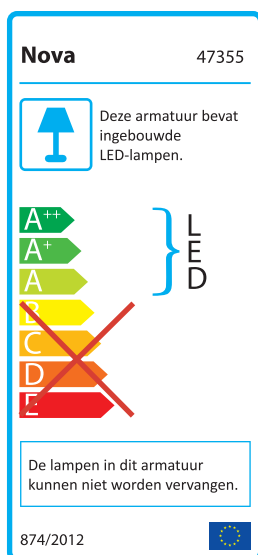

Instructies

- Voor veilig gebruik van deze LED wandlamp moet de gebruiker deze gebruiksaanwijzing zorgvuldig hebben gelezen en begrepen.
- Voordat de LED wandlamp wordt geïnstalleerd zorg ervoor dat de stroomvoorziening is uitgeschakeld om letsel te voorkomen ten gevolge van elektrische schok. Bij onderhoud aan het armatuur, tevens de stroomvoorziening uitschakelen.
- Geschikt voor buitengebruik.
- De LED wandlamp mag alleen worden gebruikt als het goed functioneert. Als de LED wandlamp gedeeltelijk of geheel defect is NIET meer gebruiken.
- Bij defecten of zware beschadigingen aan de LED wandlamp laat een erkend elektricien of iemand met de technische kennis en ervaring het defect verhelpen.
- Dit product is geschikt voor installatie op oppervlakken met een normale ontvlambaarheid zoals bv hout, gipsplaten en metselwerk. Het is niet geschikt voor gebruik op licht ontvlambare oppervlakken zoals piepschuim, textiel.
- Voordat de bevestigingsgaten in het oppervlak worden aangebracht, controleer of er geen obstakels zijn verborgen onder het montagevlak, zoals leidingen of kabels.
- Zorg ervoor dat het bevestigingsmateriaal sterk genoeg is om het gewicht van de LED wandlamp te kunnen dragen.
- De LED wandlamp moet zo worden geplaatst dat er minstens 1 meter tussen de lamp en het te verlichten oppervlak is.
- Niet monteren op oppervlakken die vochtig, net geverfd of anderszins elektrisch geleidend kunnen zijn, zoals metalen oppervlakken.
- Dit product is ontworpen voor een permanente installatie.
- Bij het aansluiten van de bekabeling zorg ervoor dat de klemmen goed zijn vastgedraaid en dat er geen delen van de draden uitsteken. Controleer of de klemmen zijn vastgezet op de geleiders en niet op de isolatie.
- Dit product is niet geschikt voor gebruik door kinderen.
- U wordt geadviseerd om extra controle uit te voeren op de elektrische verbinding die u hebt gemaakt. Nadat u de installatie heeft voltooid, zorg ervoor dat de verbinding is gecontroleerd en getest volgens de laatste bouwvoorschriften.
- De stroomkabel moet waterdicht en geschikt zijn voor buitengebruik. Type kabel H05RN-F 3G 1.0 mm² of beter.
- De garantie vervalt bij onjuiste installatie als gevolg van het niet naleven van de installatie instructies vermeld in deze handleiding.

Installatie

- Kies een geschikte locatie voor het plaatsen van de LED wandlamp, in acht nemend de eerder genoemde instructies.
- De LED wandlamp is alleen geschikt voor vaste montage.
- Gebruik de montageplaat om de plaats van de schroeven te markeren, boor vervolgens de gaten, of schroef de montageplaat meteen vast.
- Gebruik de meegeleverde O-ringen voor de bevestiging van de montageplaat, om er zeker van te zijn dat er geen water binnendringt.
- Installeer de LED wandlamp met behulp van montage materialen die geschikt zijn voor dit armatuur. (Niet meegeleverd).
- Bevestig de uiteinden van de kabel op de juiste manier in een kabeldoos:


Fase = L = Bruin
Nul = N = Blauw

- Schakel de stroom in en test de LED wandlamp.
- Kantel de LED wandlamp in de positie om het object te verlichten.

Waarschuwing:

Gebruik geen agressieve schoonmaakmiddelen of scherpe voorwerpen om het armatuur schoon te maken. Gebruik een zachte doek om het armatuur schoon te maken.

De lichtbron van het armatuur kan niet worden vervangen. Als de lichtbron defect is dient u het gehele armatuur te vervangen.



Deze markering geeft aan dat dit product niet mag worden weggegooid met ander huishoudelijk afval in de EU. Om mogelijke schade aan het milieu of de menselijke gezondheid door ongecontroleerde afvalverwijdering te voorkomen, recycle het verantwoord om het duurzaam hergebruik van materialen te bevorderen. Om uw gebruikte apparaat inleveren, kunt u gebruik maken van de teruggave- en inzamelsystemen of neem contact op met de winkel waar het product is gekocht.




Dit product voldoet aan de eisen van de Europese Gemeenschap. Getest volgens LVD 2006/95/EG. Getest volgens EMC 2004/108/EG. Getest volgens RoHS directive 2011/65/EG.

LED WALL LAMP OUTDOOR - INSTRUCTIONS

Attention: Carefully read through the instructions below and keep these instructions as a reference.

Item	47170
Type LED	3535 SMD - 4 LED's
Lumen	830 Lm
Wattage	12 watt
Voltage	230V ~ 50Hz
Powerfactor	0.5
Lifetime	30.000 hour
Switching cycles	15.000 x
Warm-up time	< 1 second
Color temperature	3000 K
Dimable	No
Light beam angle	90°
CRI	>RA 65
Protection class	IP54
Safety class	II
Size B x H x D	220 x 40 x 120 mm

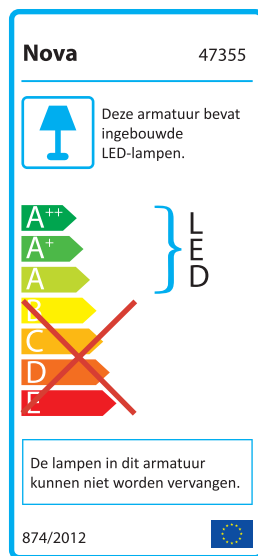

- For safe operation of this LED wall light, the user must have carefully read and understood this manual.
- Before the LED wall light is installed make sure the power supply is turned off to prevent electric shock or injuries caused by electric shock. Before maintenance on the LED wall light, also switch off the power supply.
- Outdoor use only.
- The LED wall light can only be used if it functions properly. Don't use the LED floodlight if the LED wall light is partially or completely defective NOT use more.
- When there are defects or serious damage to the LED wall light contact a qualified electrician to repair the defects or someone with the technical knowledge and experience.
- This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
- Before making fixing holes into the surface, check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.
- Make sure that the fixings are strong enough to support the considerable weight of the LED flood light and hold it rigidly.
- The lamp must be positioned so that there is at least 1 meter between the LED flood light and the illuminated surface.
- Do not attach to surfaces which are damp, freshly painted or otherwise electrically conductive, such as metallic surfaces.
- This product is designed for fixed installation.
- When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the conductors and not on any insulation.
- This product is not intended to be used by children.
- You are advised to double-check any electrical connection you have made. After you have completed the installation make sure you have checked and tested the connection to be according to the building regulations.
- The powercord must be a waterproof H05RN-F 3G 1.0 mm² cable or better.
- Improper installation due to non-compliance with the installation instructions, mentioned in this manual, the warranty will expire.

Installation

- Choose the location for the LED wall light taking in consideration the points listed above.
- The LED wall light is only suitable for fixed mounting.
- Install the LED wall light with good quality mounting materials suitable for this kind of floodlights.
- Use the rubber O-rings included with the fixture to make sure the fixture will be waterproof.
- Use the bracket to mark the fixing points and drill the holes, or fix it directly.
- Attach the ends of the cable in the right way in a cable box:



Live = L = Brown
Neutral = N = Blue

- Restore the power and test the LED wall light.
- Adjust the LED wall light head towards the area to be illuminated.

Maintenance

Do not use abrasive cleaners or sharp objects to clean the fixture. To clean the fixture use a soft cloth.

CAUTION: The light source of the fixture can not be replaced, please replace the complete fixture if the light source is broken.

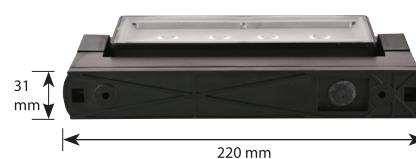

This marking indicates that this product should not be disposed with other household waste throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased.



This product meets the requirements of the European Community.
Tested according LVD 2006/95/EG. Tested according EMC 2004/108/EG. Tested according RoHS directive 2011/65/EG.